

# CMP

## PRESSE



TON. 300  
piegalamiere

pressa  
oleodinamica  
a 2 velocità  
con cambio  
automatico  
bancale idraulico  
con comandi a  
pedali con  
fotocellule o  
comandi a  
pulsanti

Oilyielding engine press  
at two gears with  
automatic lessening  
hydraulic axle at pedal  
with photoelectric cell  
barrier lessening  
push-buttons



mod. 571/sp

Pressa oleodinamica Ton 200 con  
bancale fisso. Piano da 2000x1000  
per raddrizzazione lamiere

Oilyielding presse Ton 200 with fixed  
bank. Plane to 2000x1000 for straihten  
sheet




mod. 571



**piani delle presse a  
richiesta sino a  
6000x2000 mobile**

**Tables presses at request  
until 6000x2000**

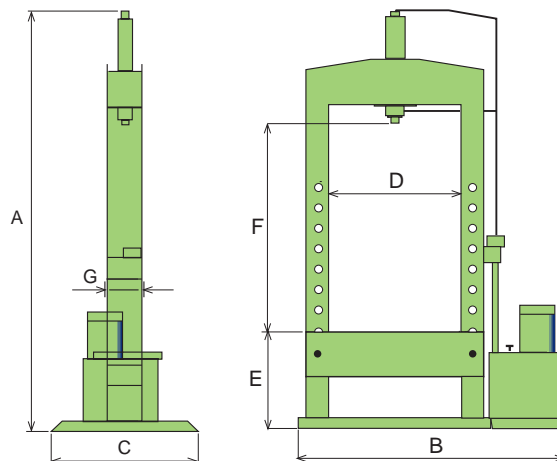

### CARATTERISTICHE

Pressa idraulica centralina ad alta pressione, motore tre fasi 220/380 con dotazione di valvola regolazione pressione. Discesa rapida con passaggio automatico alla velocità di lavoro. Possibilità di arresto del pistone in qualsiasi posizione. Ritorno idraulico dello stelo con potenza di trazione pari all'8% della potenza di spinta. Sollevamento del bancale idraulico con carter di protezione comandi a 2 mani.

### CHARACTERISTICS

Hydraulic press with high pressure station. Engine at three phase difference 220/380. Power with equip adjustable pressure valve. Rapid descent with automatic passing at working gear. Stop possibility of piston in any position. Hydraulic return of stem with traction power equal 8% of thrust power. Hydraulic axle with protection carter. Control at two hands.

### DATI TECNICI - Technical data

Ton.	Art.	Pressione Pressure max. Bar.	Corsa stelo Stroke mm	Ø stelo Rod diameter mm	Potenza motore Motor HP	Velocità discesa stelo Approach speed mm/sec.	Velocità di lavoro Working speed mm/sec.	Peso Weight Q.li
150	570	400	400	140	5,5	28	3	3000
200	571	400	400	200	5,5	28	3	3800
250	573	400	400	220	5,5	28	3	4000
300	572	400	450	280	7,5	28	3	4800
400	578	400	500	350	10	28	3	6000

### DIMENSIONI - Dimensions

Ton.	Art.	A	B	C	D	E	F	G
150	570	2350	2150	1000	1550	730	1000	380
200	571	2800	2400	1300	1550	830	1000	400
250	573	2800	2400	1500	1550	830	1000	400
300	572	3000	2600	1500	1550	830	1000	450
400	578	3300	3000	1500	1550	930	1000	500

**pressa oleodinamica  
a 2 velocità con cambio  
automatico bancale idraulico  
con comandi a pedali con  
fotocellule o comandi a  
pulsanti**

**Oilyielding engine press at two gears  
with automatic lessening hydraulic  
axle at pedal with photoelectric cell  
barrier lessening  
push-buttons**

di Poma Angelo & Figli - Via Belvedere, 8 - 24060 BOLGARE (BG)  
Tel. 035/841176 - 338/7285750 - Fax 035/8350109  
www.cmp-presse.it - E-mail: info@cmp-presse.it

